

Robust Shortest Path Problems with Two Uncertain Multiplicative Cost Coefficients

Changhyun Kwon

Department of Industrial and Systems Engineering
University at Buffalo, SUNY, USA

Taehan Lee

Department of Industrial and Information Systems Engineering
Chonbuk National University, Korea
Corresponding author. E-mail: myth0789@jbnu.ac.kr

Paul Berglund

Norfolk Southern Corporation
Atlanta, Georgia, USA

April 24, 2013

Abstract

We consider a robust shortest path problem when the cost coefficient is the product of two uncertain factors. We first show that the robust problem can be solved in polynomial time by a dual variable enumeration with shortest path problems as subproblems. We also propose a path enumeration approach using a K -shortest paths finding algorithm that may be efficient in many real cases. An application in hazardous materials transportation is discussed and the solution methods are illustrated by numerical examples.

Keywords: robust shortest path; budgeted uncertainty; hazardous materials transportation

1 Introduction

For a directed and weighted graph $G(\mathcal{N}, \mathcal{A})$ we are interested in the following shortest path problem:

$$\min_{x \in \Omega} \sum_{(i,j) \in \mathcal{A}} p_{ij} c_{ij} x_{ij} \quad (1)$$

where

$$\Omega \equiv \left\{ x : \sum_{(i,j) \in \mathcal{A}} x_{ij} - \sum_{(j,i) \in \mathcal{A}} x_{ji} = b_i \quad \forall i \in \mathcal{N}, \text{ and } x_{ij} \in \{0, 1\} \quad \forall (i, j) \in \mathcal{A} \right\}$$

The parameter b_i has the following values:

$$b_i = \begin{cases} 1 & \text{if } i = \text{origin} \\ -1 & \text{if } i = \text{destination} \\ 0 & \text{otherwise} \end{cases}$$

When p_{ij} and c_{ij} are known, problem (1) can be solved as a regular shortest path problem. The arc costs often arise as the product of two factors as in (1). For example, in hazardous materials transportation, p_{ij} and c_{ij} represent the accident probability and the accident consequence, respectively. We will discuss this application to hazardous materials transportation in Section 6.

In many realistic cases, accurate estimates for the parameters p_{ij} and c_{ij} may be unavailable. When only one of the factors p_{ij} or c_{ij} is unknown and its values are confined to a set of uncertainty, a general type of robust shortest path algorithm [14] minimizes the worst case cost as follows:

$$\min_{x \in \Omega} \max_{\tilde{c} \in \mathcal{C}} \tilde{c}^T x \quad (2)$$

where \mathcal{C} is the set of possible realizations of the uncertain cost parameter \tilde{c} . When \mathcal{C} is a box-constrained set or a budgeted box-constrained set, problem (2) can be solved in polynomial time [7]. On the other hand, when \mathcal{C} is an ellipsoid [6, 9] or a set of scenarios [14], problem (2) becomes NP-hard, in general.

In this paper, we consider the more general problem where both p and c vectors are uncertain and each resides in its own uncertainty set. In particular, we consider the uncertain parameters \tilde{p}_{ij} and \tilde{c}_{ij} as represented by the following budgeted box-constrained uncertainty sets:

$$\begin{aligned} \tilde{p}_{ij} &= p_{ij} + q_{ij} u_{ij} \\ \tilde{c}_{ij} &= c_{ij} + d_{ij} v_{ij} \end{aligned} \quad (3)$$

where p_{ij} , q_{ij} , c_{ij} , and d_{ij} are all nonnegative, and

$$u_{ij} \in U = \left\{ u : 0 \leq u_{ij} \leq 1 \quad \forall (i, j), \quad \sum_{(i,j)} u_{ij} \leq \Gamma_u \right\}$$

$$v_{ij} \in V = \left\{ v : 0 \leq v_{ij} \leq 1 \quad \forall(i, j), \quad \sum_{(i,j)} v_{ij} \leq \Gamma_v \right\}$$

and Γ_u and Γ_v are positive integers. This structure extends Bertsimas and Sim [7]. The parameters Γ_u and Γ_v are called the budgets of uncertainty and reflect the risk attitude of the decision makers: the larger the budget of uncertainty, the more risk-averse the decision maker is.

In Section 2, we study properties of the robust shortest problem with the parameter model (3), and, in Section 3, we show that the robust problem of interest can be solved in polynomial time by a method based on dual variable enumeration and regular shortest path problems. In Section 4, we provide another algorithm based on enumeration that uses a K -shortest path finding algorithm whose worst-case complexity is exponential, but may be efficient in real cases. In Section 5, we compare our formulation with the approach of Bertsimas and Sim [7]. In Section 6, we motivate the parameter model (3) and illustrate the algorithms with an application in hazardous materials transportation.

2 The Robust Problem

In this paper, we consider a robust optimization model of the form:

$$\min_{x \in \Omega} \max_{u \in U, v \in V} \sum_{(i,j)} (p_{ij} + q_{ij}u_{ij})(c_{ij} + d_{ij}v_{ij})x_{ij} \quad (4)$$

$$= \min_{x \in \Omega} \left[\sum_{(i,j)} p_{ij}c_{ij}x_{ij} + \max_{u \in U, v \in V} \sum_{(i,j)} (q_{ij}c_{ij}x_{ij}u_{ij} + p_{ij}d_{ij}x_{ij}v_{ij} + q_{ij}d_{ij}x_{ij}u_{ij}v_{ij}) \right] \quad (5)$$

We note that the inner maximization problem is a disjoint bilinear program (DBP) for any given x . Although the problem is not a convex optimization problem, an optimal solution exists at an extreme point [10]. While DBP is NP-hard in general [17], this special case can be solved efficiently with transformation to a linear program.

The inner problem is equivalent to: for any x

$$\begin{aligned} & \max_{u,v,w} \sum_{(i,j)} (q_{ij}c_{ij}x_{ij}u_{ij} + p_{ij}d_{ij}x_{ij}v_{ij} + q_{ij}d_{ij}x_{ij}w_{ij}) & (6) \\ \text{subject to} & \quad u_{ij} \leq 1 & (\rho_{ij}) \\ & \quad v_{ij} \leq 1 & (\mu_{ij}) \\ & \quad -u_{ij} + w_{ij} \leq 0 & (\eta_{ij}) \\ & \quad -v_{ij} + w_{ij} \leq 0 & (\pi_{ij}) \\ & \quad \sum_{(i,j)} u_{ij} \leq \Gamma_u & (\theta_u) \\ & \quad \sum_{(i,j)} v_{ij} \leq \Gamma_v & (\theta_v) \end{aligned}$$

$$u_{ij}, v_{ij}, w_{ij} \geq 0$$

When Γ_u and Γ_v are positive integers, we can easily show that the polytope defined by the constraints of problem (6) is integral; therefore, the optimal u , v and w are binary.

Lemma 1. When Γ_u and Γ_v are integers, a solution to problem (6) is integral for any given x .

Proof. We may express the constraint of (6) in a matrix-vector notation:

$$\begin{array}{ll}
\text{(Row Group 1)} & \\
\text{(Row Group 2)} & \\
\text{(Row Group 3)} & \\
\text{(Row Group 4)} & \\
\text{(Row 5)} & \\
\text{(Row 6)} &
\end{array}
\begin{array}{|c|c|c|}
\hline
I_{|\mathcal{A}|} & & \\
\hline
& I_{|\mathcal{A}|} & \\
\hline
-I_{|\mathcal{A}|} & & I_{|\mathcal{A}|} \\
\hline
& -I_{|\mathcal{A}|} & I_{|\mathcal{A}|} \\
\hline
1_{|\mathcal{A}|}^\top & & \\
\hline
& 1_{|\mathcal{A}|}^\top & \\
\hline
\end{array}
\begin{array}{l} \\ \\ \\ \\ \\ \\ \\ \end{array}
\begin{array}{l} \\ \\ \\ \\ \\ \\ \\ \end{array}
\leq
\begin{array}{|c|}
\hline
1_{|\mathcal{A}|} \\
\hline
1_{|\mathcal{A}|} \\
\hline
0_{|\mathcal{A}|} \\
\hline
0_{|\mathcal{A}|} \\
\hline
\Gamma_u \\
\hline
\Gamma_v \\
\hline
\end{array}
\tag{7}$$

where $I_{|\mathcal{A}|}$ is a $|\mathcal{A}| \times |\mathcal{A}|$ identity matrix, $1_{|\mathcal{A}|}$ is a $|\mathcal{A}| \times 1$ vector with all elements being unity, and

$$u = [u_1, u_2, \dots, u_{|\mathcal{A}|}]^\top, \quad v = [v_1, v_2, \dots, v_{|\mathcal{A}|}]^\top, \quad w = [w_1, w_2, \dots, w_{|\mathcal{A}|}]^\top$$

Empty partitions are all zero.

For any collection of rows of the constraint matrix in (7), we can construct two partitions such that the sum of rows in one partition minus the sum of rows in the other partition has only $-1, 0, +1$ in each column; then it is totally unimodular [8, 11]. That is, for any collection of rows, if we multiply $+1$ or -1 to each row then the sum of rows will have only $-1, 0, +1$ in each column.

In any collection of rows, we first multiply $+1$ to rows from Row Group 3 and -1 to rows from Row Group 4. If Row 5 is present in the collection, we multiply $+1$ to Row 5; if Row 6 is present, we multiply -1 to Row 6. Then, the current sum of rows has only $-1, 0, +1$ in each column. We can multiply ± 1 to rows from Row Groups 1 and 2 appropriately to keep $-1, 0, +1$ in each column of the sum of rows. Therefore, the constraint matrix is totally unimodular.

Given that Γ_u and Γ_v are integers and the constraint matrix is totally unimodular, a solution of (6) is integral. \square

Lemma 2. Problem (6) is equivalent to the inner problem of (4).

Proof. We need to prove that $w_{ij} = u_{ij}v_{ij}$ at any optimum. For any (i, j) ,

- If $u_{ij} = 1$, $v_{ij} = 1$, then $w_{ij} \leq 1$. Because we maximizes $q_{ij}d_{ij}x_{ij}w_{ij}$ with all coefficients nonnegative, $w_{ij} = 1$ at any optimum.
- If $u_{ij} = 0$, $v_{ij} = 1$, then $w_{ij} \leq 0$, and therefore $w_{ij} = 0$.
- If $u_{ij} = 1$, $v_{ij} = 0$, then $w_{ij} \leq 0$, and therefore $w_{ij} = 0$.

- If $u_{ij} = 0$, $v_{ij} = 0$, then $w_{ij} \leq 0$, and therefore $w_{ij} = 0$.

Because any solution of (6) is integral by Lemma 1, this completes the proof of $w_{ij} = u_{ij}v_{ij}$. \square

Let us consider the dual problem of (6) with the corresponding dual variables in parentheses:

$$\min_{\theta_u, \theta_v, \rho_{ij}, \mu_{ij}, \eta_{ij}, \pi_{ij}} \Gamma_u \theta_u + \Gamma_v \theta_v + \sum_{(i,j)} (\rho_{ij} + \mu_{ij}) \quad (8)$$

$$\text{subject to } \rho_{ij} - \eta_{ij} + \theta_u \geq q_{ij} c_{ij} x_{ij} \quad (9)$$

$$\mu_{ij} - \pi_{ij} + \theta_v \geq p_{ij} d_{ij} x_{ij} \quad (10)$$

$$\eta_{ij} + \pi_{ij} \geq q_{ij} d_{ij} x_{ij} \quad (11)$$

$$\rho_{ij}, \mu_{ij}, \eta_{ij}, \pi_{ij}, \theta_u, \theta_v \geq 0 \quad (12)$$

Using strong duality, we can write the robust optimization problem (4) as:

$$\min \Gamma_u \theta_u + \Gamma_v \theta_v + \sum_{(i,j)} (p_{ij} c_{ij} x_{ij} + \rho_{ij} + \mu_{ij}) \quad (13)$$

$$\text{subject to } x \in \Omega \quad (14)$$

$$\rho_{ij} - \eta_{ij} + \theta_u \geq q_{ij} c_{ij} x_{ij} \quad (15)$$

$$\mu_{ij} - \pi_{ij} + \theta_v \geq p_{ij} d_{ij} x_{ij} \quad (16)$$

$$\eta_{ij} + \pi_{ij} \geq q_{ij} d_{ij} x_{ij} \quad (17)$$

$$\rho_{ij}, \mu_{ij}, \eta_{ij}, \pi_{ij}, \theta_u, \theta_v \geq 0 \quad (18)$$

which is a mixed integer linear program (MILP). Problem (3) can be solved by solving a finite number of shortest path problems when either Γ_u or Γ_v is zero [7].

3 A Dual Variable Enumeration Approach

In this section, we present a dual variable enumeration method, in which we search a finite number of (θ_u, θ_v) pairs to solve problem (13). We will first represent $\rho_{ij} + \mu_{ij}$ as a function of θ_u, θ_v and x and eliminate the constraints (15)–(17). Then, we show that, in each sub-space of the whole (θ_u, θ_v) -space, we can find a solution at an extreme point; consequently, we can examine all such extreme points of sub-spaces to find an optimal (θ_u, θ_v) pair. We will need to solve a (nominal) shortest-path problem for each extreme-point examination. Some improvements follow in Sections 3.1 and 3.2.

The following theorem represents π_{ij} , η_{ij} , ρ_{ij} , and μ_{ij} using θ_u , θ_v , and x .

Theorem 1. For any given θ_u and θ_v , there exists an optimal solution to (8)–(12) such that:

$$\pi_{ij} = \min (q_{ij} d_{ij} x_{ij}, \max(\theta_v - p_{ij} d_{ij} x_{ij}, 0)) \quad (19)$$

$$\eta_{ij} = q_{ij} d_{ij} x_{ij} - \min (q_{ij} d_{ij} x_{ij}, \max(\theta_v - p_{ij} d_{ij} x_{ij}, 0)) \quad (20)$$

$$\rho_{ij} = \max \left(q_{ij}c_{ij}x_{ij} + q_{ij}d_{ij}x_{ij} - \min \left(q_{ij}d_{ij}x_{ij}, \max(\theta_v - p_{ij}d_{ij}x_{ij}, 0) \right) - \theta_u, 0 \right) \quad (21)$$

$$\mu_{ij} = \max \left(p_{ij}d_{ij}x_{ij} + \min \left(q_{ij}d_{ij}x_{ij}, \max(\theta_v - p_{ij}d_{ij}x_{ij}, 0) \right) - \theta_v, 0 \right) \quad (22)$$

for all $(i, j) \in \mathcal{A}$.

Proof. First, we will represent the solution of (8)–(12) in terms of θ_v and x . We observe that there exists an optimal solution such that

$$\eta_{ij} + \pi_{ij} = q_{ij}d_{ij}x_{ij} \quad \forall (i, j) \in \mathcal{A} \quad (23)$$

for any given x . This is because minimizing η_{ij} and π_{ij} as much as possible may lead to smaller values of θ_u , ρ_{ij} and μ_{ij} which decrease the objective function value, and η_{ij} and π_{ij} are not present in the objective function. Therefore there exists an optimal solution such that

$$0 \leq \eta_{ij} \leq q_{ij}d_{ij}x_{ij}$$

$$0 \leq \pi_{ij} \leq q_{ij}d_{ij}x_{ij}$$

for all $(i, j) \in \mathcal{A}$ and we can determine η_{ij} and π_{ij} by some allocation of $q_{ij}d_{ij}x_{ij}$ between η_{ij} and π_{ij} such that other constraints are satisfied.

Now suppose that θ_u and θ_v are fixed. Then we can write the constraints (9) and (10) as

$$\rho_{ij} = \max(q_{ij}c_{ij}x_{ij} - \theta_u + \eta_{ij}, 0)$$

$$\mu_{ij} = \max(p_{ij}d_{ij}x_{ij} - \theta_v + \pi_{ij}, 0)$$

Increasing η_{ij} and π_{ij} may increase ρ_{ij} and μ_{ij} and consequently increase the objective function value. Therefore, we need to find a way to allocate $q_{ij}d_{ij}x_{ij}$ to η_{ij} and π_{ij} without increasing the objective function value. We observe that, if $q_{ij}c_{ij}x_{ij} - \theta_u < 0$ for some $(i, j) \in \mathcal{A}$, we can increase η_{ij} without increasing ρ_{ij} . Therefore, an optimal solution in this case is to allocate $q_{ij}d_{ij}x_{ij}$ to η_{ij} as much as we can, that is, until $q_{ij}c_{ij}x_{ij} - \theta_u + \eta_{ij} = 0$. We can apply a similar argument to μ_{ij} and π_{ij} . On the other hand, if $q_{ij}c_{ij}x_{ij} - \theta_u \geq 0$ and $p_{ij}d_{ij}x_{ij} - \theta_v \geq 0$, then any allocation to η_{ij} and π_{ij} will have the same impact to the objective function value, since the cost coefficients of ρ_{ij} and μ_{ij} are identical.

From the above observations, we can consider the following optimal allocation rules for η_{ij} and π_{ij} when θ_u and θ_v are fixed:

Case 1. For $(i, j) \in \mathcal{A}$ such that

$$q_{ij}c_{ij}x_{ij} - \theta_u \geq 0$$

$$p_{ij}d_{ij}x_{ij} - \theta_v \geq 0$$

any combination of $\eta_{ij} \geq 0$ and $\pi_{ij} \geq 0$ such that $\eta_{ij} + \pi_{ij} = q_{ij}d_{ij}x_{ij}$ is optimal.

Case 2. For $(i, j) \in \mathcal{A}$ such that

$$\begin{aligned} q_{ij}c_{ij}x_{ij} - \theta_u &< 0 \\ p_{ij}d_{ij}x_{ij} - \theta_v &\geq 0 \end{aligned}$$

we can first allocate some of $q_{ij}d_{ij}x_{ij}$ to η_{ij} until $q_{ij}c_{ij}x_{ij} - \theta_u + \eta_{ij} = 0$ in advance, and then allocate any remaining amount to η_{ij} and π_{ij} by any combination. For example, we can consider $\eta_{ij} = q_{ij}d_{ij}x_{ij}$ and $\pi_{ij} = 0$.

Case 3. For $(i, j) \in \mathcal{A}$ such that

$$\begin{aligned} q_{ij}c_{ij}x_{ij} - \theta_u &\geq 0 \\ p_{ij}d_{ij}x_{ij} - \theta_v &< 0 \end{aligned}$$

we can first allocate some of $q_{ij}d_{ij}x_{ij}$ to π_{ij} until $p_{ij}d_{ij}x_{ij} - \theta_v + \pi_{ij} = 0$ in advance, and then allocate any remaining amount to η_{ij} and π_{ij} by any combination. For example, we can consider $\pi_{ij} = q_{ij}d_{ij}x_{ij}$ and $\eta_{ij} = 0$.

Case 4. For $(i, j) \in \mathcal{A}$ such that

$$\begin{aligned} q_{ij}c_{ij}x_{ij} - \theta_u &< 0 \\ p_{ij}d_{ij}x_{ij} - \theta_v &< 0 \end{aligned}$$

we can first allocate some of $q_{ij}d_{ij}x_{ij}$ to η_{ij} until $q_{ij}c_{ij}x_{ij} - \theta_u + \eta_{ij} = 0$, and then allocate any remaining amount to π_{ij} until $p_{ij}d_{ij}x_{ij} - \theta_v + \pi_{ij} = 0$. If there is any remaining amount, we can allocate additionally to η_{ij} and π_{ij} by any combination.

Using the above optimal allocation rules, we can obtain an optimal solution for given θ_u and θ_v . From Cases 3 and 4, when $p_{ij}d_{ij}x_{ij} - \theta_v < 0$, we can consider allocating $\min(q_{ij}d_{ij}x_{ij}, \theta_v - p_{ij}d_{ij}x_{ij})$ to π_{ij} without worrying about η_{ij} . From Cases 1 and 2, when $p_{ij}d_{ij}x_{ij} - \theta_v \geq 0$, we can simply put $\pi_{ij} = 0$. Therefore, an optimal allocation to π_{ij} is

$$\pi_{ij} = \min(q_{ij}d_{ij}x_{ij}, \max(\theta_v - p_{ij}d_{ij}x_{ij}, 0))$$

for all $(i, j) \in \mathcal{A}$ and any given $\theta_v \geq 0$. Using the condition (23), we have the corresponding allocation to η_{ij} as

$$\eta_{ij} = q_{ij}d_{ij}x_{ij} - \min(q_{ij}d_{ij}x_{ij}, \max(\theta_v - p_{ij}d_{ij}x_{ij}, 0)) \quad (24)$$

for all $(i, j) \in \mathcal{A}$ and any given $\theta_v \geq 0$. Note that the expression (20) is not dependent on θ_u .

From (19) and (24), we can now determine ρ_{ij} and μ_{ij} as follows:

$$\rho_{ij} = \max(q_{ij}c_{ij}x_{ij} - \theta_u + \eta_{ij}, 0)$$

$$\begin{aligned}
&= \max \left(q_{ij}c_{ij}x_{ij} + q_{ij}d_{ij}x_{ij} - \min \left(q_{ij}d_{ij}x_{ij}, \max(\theta_v - p_{ij}d_{ij}x_{ij}, 0) \right) - \theta_u, 0 \right) \\
\mu_{ij} &= \max(p_{ij}d_{ij}x_{ij} - \theta_v + \pi_{ij}, 0) \\
&= \max \left(p_{ij}d_{ij}x_{ij} + \min \left(q_{ij}d_{ij}x_{ij}, \max(\theta_v - p_{ij}d_{ij}x_{ij}, 0) \right) - \theta_v, 0 \right)
\end{aligned}$$

We obtain the theorem. \square

We can now express $\rho_{ij} + \mu_{ij}$ as a function of x_{ij} with cost coefficients dependent on θ_u and θ_v .

Lemma 3. For any given θ_u and θ_v , suppose a solution to (8)–(12) is given as in (19)–(22). The sum $\rho_{ij} + \mu_{ij}$ can be expressed as follows:

$$\rho_{ij} + \mu_{ij} = \begin{cases} 0 \cdot x_{ij} & \text{if Condition 1 or Condition 4 holds,} \\ (q_{ij}c_{ij} - \theta_u)x_{ij} & \text{if Condition 2 holds,} \\ (p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij} - \theta_u - \theta_v)x_{ij} & \text{if Condition 3 or Condition 5 holds,} \\ (p_{ij}d_{ij} - \theta_v)x_{ij} & \text{if Condition 6 holds.} \end{cases} \quad (25)$$

for each $(i, j) \in \mathcal{A}$ and all $\theta_u \geq 0$ and $\theta_v \geq 0$, where

Condition 1 : $\theta_u \geq q_{ij}c_{ij}$, and $\theta_v \geq p_{ij}d_{ij} + q_{ij}d_{ij}$

Condition 2 : $\theta_u \leq q_{ij}c_{ij}$, and $\theta_v \geq p_{ij}d_{ij} + q_{ij}d_{ij}$

Condition 3 : $p_{ij}d_{ij} \leq \theta_v \leq p_{ij}d_{ij} + q_{ij}d_{ij}$, and $\theta_u + \theta_v \leq p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij}$

Condition 4 : $p_{ij}d_{ij} \leq \theta_v \leq p_{ij}d_{ij} + q_{ij}d_{ij}$, and $\theta_u + \theta_v \geq p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij}$

Condition 5 : $\theta_u \leq q_{ij}c_{ij} + q_{ij}d_{ij}$, and $\theta_v \leq p_{ij}d_{ij}$

Condition 6 : $\theta_u \geq q_{ij}c_{ij} + q_{ij}d_{ij}$, and $\theta_v \leq p_{ij}d_{ij}$

Proof. For the simplicity of notation, we drop the subscript ij and let $c_0 = pc$, $c_1 = pd$, $c_2 = qc$, $c_3 = qd$. We obtain

$$\begin{aligned}
\mu &= \max \left(c_1x - \theta_v + \min \left(c_3x, \max(\theta_v - c_1x, 0) \right), 0 \right) \\
&= \max \left(\min \left((c_1 + c_3)x - \theta_v, \max(c_1x - \theta_v, 0) \right), 0 \right) \\
&= \begin{cases} \max \left(\max(c_1x - \theta_v, 0), 0 \right) & \text{if } (c_1 + c_3)x - \theta_v \geq 0 \\ \max \left((c_1 + c_3)x - \theta_v, 0 \right) & \text{if } (c_1 + c_3)x - \theta_v \leq 0 \end{cases} \\
&= \begin{cases} \max(c_1x - \theta_v, 0) & \text{if } (c_1 + c_3)x - \theta_v \geq 0 \\ 0 & \text{if } (c_1 + c_3)x - \theta_v \leq 0 \end{cases} \\
&= \begin{cases} c_1x - \theta_v & \text{if } c_1x - \theta_v \geq 0 \\ 0 & \text{if } -c_3x \leq c_1x - \theta_v \leq 0 \\ 0 & \text{if } c_1x - \theta_v \leq -c_3x \end{cases}
\end{aligned}$$

$$\begin{aligned}
&= \max(c_1x - \theta_v, 0) \\
&= \max(c_1 - \theta_v, 0)x
\end{aligned}$$

where the last equality is due to the binarity of x . Again using the binarity of x , we can express ρ as follows:

$$\begin{aligned}
\rho &= \max\left((c_2 + c_3)x - \theta_u - \min(c_3x, \max(\theta_v - c_1x, 0)), 0\right) \\
&= \max\left((c_2 + c_3) - \theta_u - \min(c_3, \max(\theta_v - c_1, 0)), 0\right)x
\end{aligned}$$

For three intervals of θ_v , we obtain the following expressions of ρ :

$$\rho = \begin{cases} \max(c_2 - \theta_u, 0)x & \text{if } \theta_v \geq c_1 + c_3 \\ \max(c_1 + c_2 + c_3 - \theta_u - \theta_v, 0)x & \text{if } c_1 \leq \theta_v \leq c_1 + c_3 \\ \max(c_2 + c_3 - \theta_u, 0)x & \text{if } \theta_v \leq c_1 \end{cases}$$

Therefore, we obtain the lemma. □

Lemma 3 means that we can obtain an optimal solution to (13) by solving a nominal shortest path problem when θ_u and θ_v are given.

Figure 1 illustrates how the value of $\rho_{ij} + \mu_{ij}$ varies according to Lemma 3 in each region of (θ_u, θ_v) for each $(i, j) \in \mathcal{A}$. We observe that in each shaded region of (θ_u, θ_v) , the cost coefficient of x_{ij} in $\rho_{ij} + \mu_{ij}$ becomes a linear function of θ_u and θ_v . We extend this observation to all links in \mathcal{A} .

Let $\{a_k\}$ be the ordered sequence of $q_{ij}c_{ij} + q_{ij}d_{ij}$ and $q_{ij}c_{ij}$ for all $(i, j) \in \mathcal{A}$ and 0, which is the set of θ_u -values where nonlinearity occurs in $\rho_{ij} + \mu_{ij}$. Similarly, let $\{b_l\}$ be the ordered sequence of $p_{ij}d_{ij}$ and $p_{ij}d_{ij} + q_{ij}d_{ij}$ for all $(i, j) \in \mathcal{A}$ and 0, for such θ_v -values. Let $\{f_m\}$ be the ordered sequence of $p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij}$ for all $(i, j) \in \mathcal{A}$ and 0, for such $(\theta_u + \theta_v)$ -values.

We consider the following problem:

$$Z_{klm} = \min_{x, \theta_u, \theta_v} \Gamma_u \theta_u + \Gamma_v \theta_v + \sum_{(i,j)} (p_{ij}c_{ij}x_{ij} + \rho_{ij} + \mu_{ij}) \quad (26)$$

$$\text{subject to } x \in \Omega \quad (27)$$

$$a_k \leq \theta_u \leq a_{k+1} \quad (28)$$

$$b_l \leq \theta_v \leq b_{l+1} \quad (29)$$

$$f_m \leq \theta_u + \theta_v \quad \text{if } f_m \in [a_k + b_l, a_{k+1} + b_{l+1}] \quad (30)$$

$$f_{m+1} \geq \theta_u + \theta_v \quad \text{if } f_{m+1} \in [a_k + b_l, a_{k+1} + b_{l+1}] \quad (31)$$

We note that within the (θ_u, θ_v) -space defined by (28)–(31) for each tuple (k, l, m) , the cost coeffi-

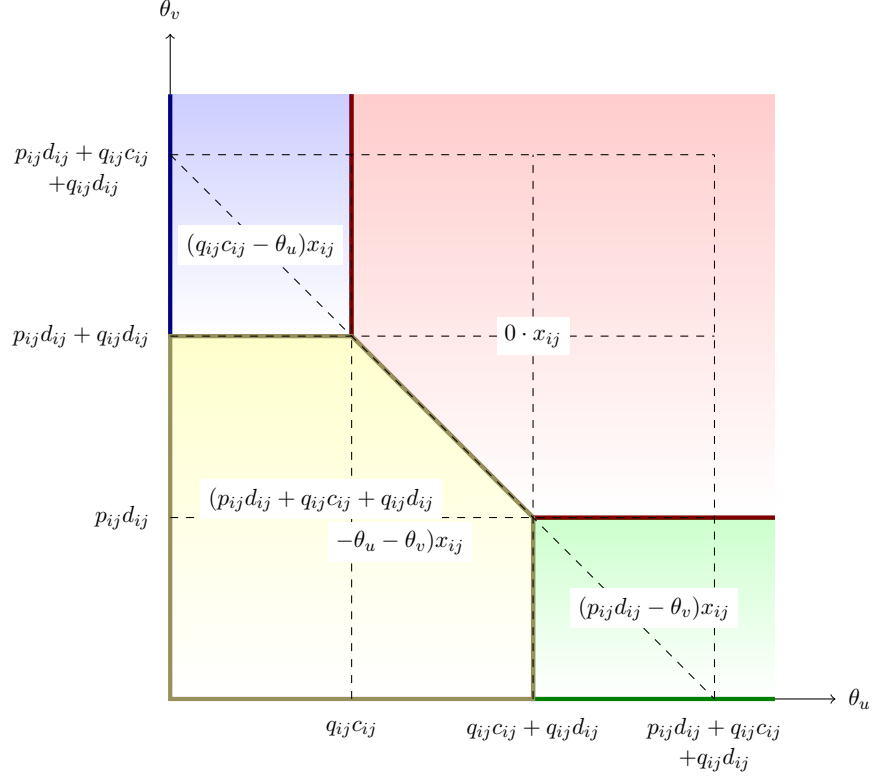


Figure 1: The value of $\rho_{ij} + \mu_{ij}$ for each interval of (θ_u, θ_v) for each link $(i, j) \in \mathcal{A}$

cient of x becomes linear in θ_u and θ_v for all links $(i, j) \in \mathcal{A}$ and for all x . Therefore, for problem Z_{klm} , we always obtain a solution at an extreme point of the feasible space defined by (28)–(31). This idea is represented in Figure 2. For the feasible region \mathbf{A}_{klm} defined by (28)–(31) in Figure 2, we know one of the six extreme points is a solution of problem (26). Therefore, we can solve problem (26) by examining those six points; for each point, the problem is a regular shortest-path problem.

If we extend this idea to the entire (θ_u, θ_v) -space, we know that we can solve the robust shortest path problem by examining the following points:

- intersections of $\theta_u = \{a_k\}$ and $\theta_v = \{b_l\}$
- intersections of $\theta_u = \{a_k\}$ and $\theta_u + \theta_v = \{f_m\}$
- intersections of $\theta_v = \{b_l\}$ and $\theta_u + \theta_v = \{f_m\}$

Accordingly, we define the following three sets of (θ_u, θ_v) :

$$\Theta_1 = \left\{ (\theta_u, \theta_v) : \theta_u \in \{0\} \cup \{q_{ij}c_{ij} + q_{ij}d_{ij}, q_{ij}c_{ij} : (i, j) \in \mathcal{A}\}, \right. \\ \left. \theta_v \in \{0\} \cup \{p_{ij}d_{ij}, p_{ij}d_{ij} + q_{ij}d_{ij} : (i, j) \in \mathcal{A}\} \right\}$$

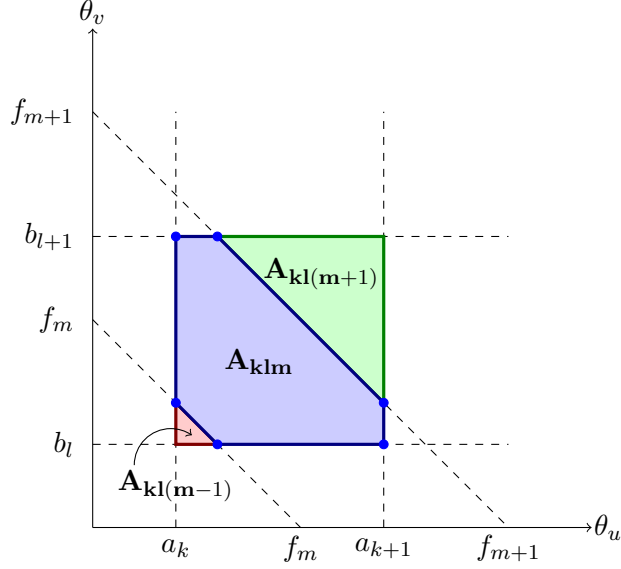


Figure 2: An illustration of decomposed feasible (θ_u, θ_v) -space on the mesh

$$\Theta_2 = \left\{ (\theta_u, \theta_v) : \theta_u \in \{0\} \cup \{q_{ij}c_{ij} + q_{ij}d_{ij}, q_{ij}c_{ij} : (i, j) \in \mathcal{A}\}, \right. \\ \left. \theta_u + \theta_v \in \{0\} \cup \{p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij} : (i, j) \in \mathcal{A}\}, \theta_v \geq 0 \right\}$$

$$\Theta_3 = \left\{ (\theta_u, \theta_v) : \theta_v \in \{0\} \cup \{p_{ij}d_{ij}, p_{ij}d_{ij} + q_{ij}d_{ij} : (i, j) \in \mathcal{A}\}, \right. \\ \left. \theta_u + \theta_v \in \{0\} \cup \{p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij} : (i, j) \in \mathcal{A}\}, \theta_u \geq 0 \right\}$$

We obtain the following theorem:

Theorem 2. Let us define the following problem with an arbitrary constraint set Θ :

$$Z(\Theta) = \min_{x \in \Omega, (\theta_u, \theta_v) \in \Theta} \Gamma_u \theta_u + \Gamma_v \theta_v + \sum_{(i,j)} (p_{ij}c_{ij}x_{ij} + \rho_{ij} + \mu_{ij}) \quad (32)$$

Then the robust shortest path problem (3) is equivalent to the following problem:

$$Z^* = \min\{Z(\Theta_1), Z(\Theta_2), Z(\Theta_3)\} \quad (33)$$

Now we obtain the computational complexity of (33).

Theorem 3. The computational complexity of (33) is $O(|\mathcal{N}|^6)$ and the number of shortest-path problems to be solved is $O(|\mathcal{N}|^4)$.

Proof. First we note that the sizes of feasible sets are

$$|\Theta_1| = O(|\mathcal{A}|^2), \quad |\Theta_2| = O(|\mathcal{A}|^2), \quad |\Theta_3| = O(|\mathcal{A}|^2)$$

When we consider $|\mathcal{A}| = O(\mathcal{N}^2)$, the number of shortest path problems we need solve to obtain Z^* is $O(|\mathcal{N}|^4)$. Since the complexity of Dijkstra's algorithm is $O(|\mathcal{N}|^2)$, the computational complexity of (33) is $O(|\mathcal{N}|^6)$. Since there are other algorithms with better worst-case complexity [2], this provides an upper bound. \square

Obviously, the number of shortest-path problems to be solved in this method is significantly less than in the full primal variable (u and v) enumeration. When the full primal variable enumeration is used, we need to solve $\binom{|\mathcal{A}|}{\Gamma_u} \times \binom{|\mathcal{A}|}{\Gamma_v}$ number of shortest-path problems, which is 1.0651×10^{20} when $|\mathcal{A}| = 150$, $\Gamma_u = 4$, and $\Gamma_v = 8$. In the same network, the dual variable enumeration method solves 151,148 shortest path problems (see Section 6.1).

3.1 An Improvement of the Dual-Variable Enumeration Approach

In this section, we improve the dual-variable enumeration approach by reducing the number of (θ_u, θ_v) pairs to examine, therefore reducing the number of shortest path sub-problems to solve. In particular, we will examine a subset of $\Theta_1 \cup \Theta_2 \cup \Theta_3$.

In Figure 2, the extreme points of the area \mathbf{A}_{klm} are created by joining the interval diagrams like Figure 1 of two or three arcs. We observe that there are some elements of Θ_1 , Θ_2 , and Θ_3 that are not created by joining the interval diagrams—they are just interior points—depending on the coefficients p_{ij} , q_{ij} , c_{ij} , and d_{ij} .

An example diagram for two arcs (i, j) and (k, l) is provided in Figure 3. Without loss of generality, we assume that $q_{ij}c_{ij} + p_{ij}d_{ij} + q_{ij}d_{ij} \geq q_{kl}c_{kl} + p_{kl}d_{kl} + q_{kl}d_{kl}$. For arc (i, j) , we need to consider the following (θ_u, θ_v) pairs (denoted by square dots on the thinner solid line):

$$\begin{aligned} & (0, p_{ij}d_{ij} + q_{ij}d_{ij}) \\ & (q_{ij}c_{ij}, p_{ij}d_{ij} + q_{ij}d_{ij}) \\ & (q_{ij}c_{ij} + q_{ij}d_{ij}, p_{ij}d_{ij}) \\ & (q_{ij}c_{ij} + q_{ij}d_{ij}, 0) \end{aligned}$$

Note that we do not need to consider $(q_{ij}c_{ij} + q_{ij}d_{ij}, p_{ij}d_{ij} + q_{ij}d_{ij})$ and the two points at which the diagonal line meet the axes. Similarly, for arc (k, l) , we need to consider the four points denoted by square dots on the thicker solid line.

Two new points are created as extreme points, i.e. candidate points for the (θ_u, θ_v) enumeration. In Figure 3, the two new points are denoted by circle dots. In this case, they are

$$\begin{aligned} & (q_{kl}c_{kl}, p_{ij}d_{ij} + q_{ij}d_{ij}) \\ & (q_{ij}c_{ij} + q_{ij}d_{ij}, p_{kl}d_{kl}) \end{aligned}$$

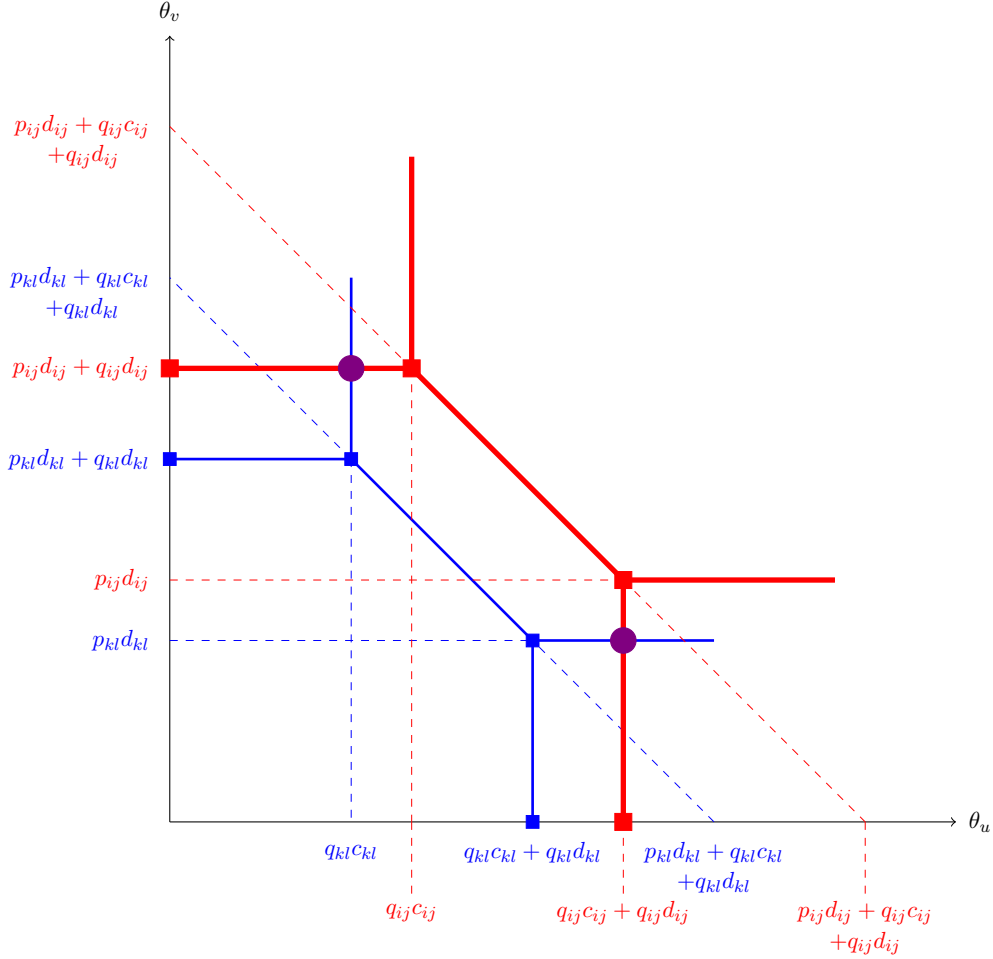


Figure 3: Joining the interval diagrams for arcs (i, j) and (k, l) . The thinner solid line represents arc (i, j) , and the thicker solid line represents arc (k, l) . Two intersection points (denoted by circle dots) represent new extreme points to be considered in the dual-variable enumeration.

When there is no overlap between the interval diagrams of any pair of arcs, they intersect at two points, creating two extreme points to consider. When there is some overlap, it creates only one or no new extreme point.

We observe that there are 11 possible cases of intersection patterns between two interval diagrams. Figure 4 represents a case of intersection patterns. Figure 4a is for an arc, and Figure 4b is for another arc. Each line segment of the interval diagram in Figure 4a is referred by A, B, \dots, E , respectively, and similarly in Figure 4b by A', B', \dots, E' . Without loss of generality, we assume that C is above C' , i.e., the intercept of the line extending the segment C is greater than C' ; we denote this assumption by $C_{xy} > C'_{xy}$ (see Table 1).

Each line segment of the first arc can intersect with the following line segments of the second arc:

$$A \text{ with } B', C', D'$$

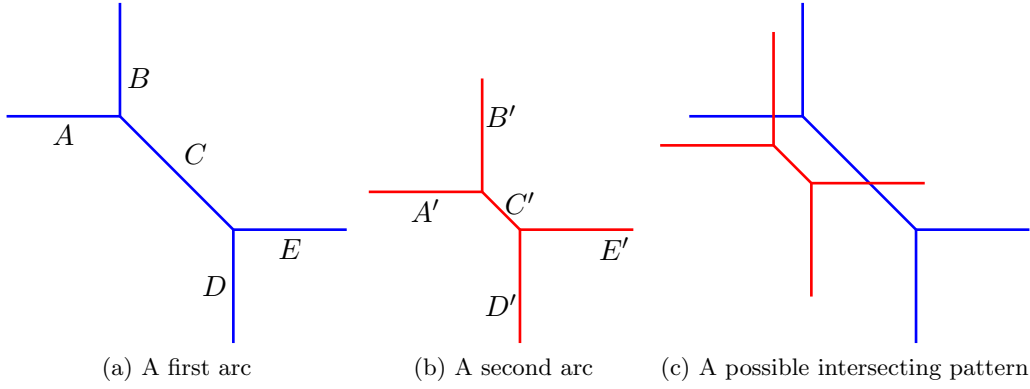


Figure 4: An intersecting pattern of the two interval diagrams of two arcs.

B with E'
 C with B', E'
 D with A', C', E'
 E with B'

Given the above possible intersecting pairs, we can enumerate the following 11 distinct intersecting patterns depending on the data values:

- $A \oplus B'$ and $C \oplus E'$ (Pattern 1)
- $A \oplus B'$ and $D \oplus E'$ (Pattern 2)
- $A \oplus B'$ and $D \oplus C'$ (Pattern 3)
- $A \oplus C'$ and $C \oplus E'$ (Pattern 4)
- $A \oplus C'$ and $D \oplus E'$ (Pattern 5)
- $A \oplus C'$ and $D \oplus C'$ (Pattern 6)
- $A \oplus D'$ and $B \oplus E'$ (Pattern 7)
- $C \oplus B'$ and $C \oplus E'$ (Pattern 8)
- $C \oplus B'$ and $D \oplus E'$ (Pattern 9)
- $C \oplus B'$ and $D \oplus C'$ (Pattern 10)
- $D \oplus A'$ and $E \oplus B'$ (Pattern 11)

where \oplus means ‘intersects with’. Note that both Patterns 7 and 11 should be considered, because they are not impacted by the values of C_{xy} and C'_{xy} . Figure 4c shows an example of Pattern 1, and Figure 3 shows Pattern 2. Each pattern provides only 2 new extreme points to be considered and they are provided in Table 1 with conditions.

We construct the set of candidate (θ_u, θ_v) pairs as following (as opposed to $\Theta_1 \cup \Theta_2 \cup \Theta_3$):

Table 1: The coordinate of the new extreme points to consider for each pattern, when the first arc is (i, j) (segments $A, B, C, D,$ and E) and the second arc is (k, l) (segments $A', B', C', D',$ and E'). A_y denotes the vertical coordinate (θ_v -axis) of the line segment A , B_x denotes the horizontal coordinate (θ_u -axis) of the line segment B , C_{xy} denotes the intercept—both intercepts are same—of the line that extends the segment C , and so on. Without loss of generality, we assume $C_{xy} > C'_{xy}$, or $p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij} > p_{kl}d_{kl} + q_{kl}c_{kl} + q_{kl}d_{kl}$.

Patterns	Intersections	Conditions	New Extreme Points to Consider, (θ_u, θ_v)
Pattern1	$A \oplus B'$ and $C \oplus E'$	$A_y > A'_y, B_x > B'_x, E_y < E'_y$	$(B'_x, A_y), (C_{xy} - E'_y, E'_y)$
Pattern2	$A \oplus B'$ and $D \oplus E'$	$A_y > A'_y, B_x > B'_x, E_y > E'_y, D_x > D'_x$	$(B'_x, A_y), (D_x, E'_y)$
Pattern3	$A \oplus B'$ and $D \oplus C'$	$A_y > A'_y, B_x > B'_x, D_x < D'_x, E_y > E'_y$	$(B'_x, A_y), (D_x, C'_{xy} - D_x)$
Pattern4	$A \oplus C'$ and $C \oplus E'$	$E'_y < A_y < A'_y, B_x > B'_x, E_y < E'_y$	$(C'_{xy} - A_y, A_y), (C_{xy} - E'_y, E'_y)$
Pattern5	$A \oplus C'$ and $D \oplus E'$	$E'_y < A_y < A'_y, B_x > B'_x, E_y > E'_y, D_x > D'_x$	$(C'_{xy} - A_y, A_y), (D_x, E'_y)$
Pattern6	$A \oplus C'$ and $D \oplus C'$	$E'_y < A_y < A'_y, B_x > B'_x, D_x < D'_x, E_y > E'_y$	$(C'_{xy} - A_y, A_y), (D_x, C'_{xy} - D_x)$
Pattern7	$A \oplus D'$ and $B \oplus E'$	$B_x > D'_x, A_y < E'_y$	$(D'_x, A_y), (B_x, E'_y)$
Pattern8	$C \oplus B'$ and $C \oplus E'$	$B_x < B'_x, E_y < E'_y$	$(B'_x, C_{xy} - B'_x), (C_{xy} - E'_y, E'_y)$
Pattern9	$C \oplus B'$ and $D \oplus E'$	$B_x < B'_x, E_y > E'_y, D_x > D'_x$	$(B'_x, C_{xy} - B'_x), (D_x, E'_y)$
Pattern10	$C \oplus B'$ and $D \oplus C'$	$B_x < B'_x, D_x < D'_x, E_y > E'_y$	$(B'_x, C_{xy} - B'_x), (D_x, C'_{xy} - D_x)$
Pattern11	$D \oplus A'$ and $E \oplus B'$	$E_y > A'_y, D_x < B'_x$	$(D_x, A'_y), (B'_x, E_y)$
		$A_y = p_{ij}d_{ij} + q_{ij}d_{ij}, \quad B_x = q_{ij}c_{ij}, \quad C_{xy} = p_{ij}d_{ij} + q_{ij}c_{ij} + q_{ij}d_{ij}$	
		$D_x = q_{ij}c_{ij} + q_{ij}d_{ij}, \quad E_y = p_{ij}d_{ij}$	
		$A'_y = p_{kl}d_{kl} + q_{kl}d_{kl}, \quad B'_x = q_{kl}c_{kl}, \quad C'_{xy} = p_{kl}d_{kl} + q_{kl}c_{kl} + q_{kl}d_{kl}$	
		$D'_x = q_{kl}c_{kl} + q_{kl}d_{kl}, \quad E'_y = p_{kl}d_{kl}$	

Step 0. Order the set of arcs in the descending order of $p_{ij}d_{ij}+q_{ij}c_{ij}+q_{ij}d_{ij}$: $|\mathcal{A}| = \{a_1, a_2, \dots, a_{|\mathcal{A}|}\}$, where a_n denotes n -th arc. Set $\Theta \leftarrow \{(0,0)\}$, and $t \leftarrow 1$.

Step 1. Denoting the t -th arc by (i, j) , add the following pairs to the set Θ :

$$\begin{aligned} & (0, p_{ij}d_{ij} + q_{ij}d_{ij}) \\ & (q_{ij}c_{ij}, p_{ij}d_{ij} + q_{ij}d_{ij}) \\ & (q_{ij}c_{ij} + q_{ij}d_{ij}, p_{ij}d_{ij}) \\ & (q_{ij}c_{ij} + q_{ij}d_{ij}, 0) \end{aligned}$$

Step 2. Consider each arc a_s in $\{a_{t+1}, \dots, a_{|\mathcal{A}|}\}$, denoting it by (k, l) . Examine the intersecting pattern between (i, j) and (k, l) according to the conditions provided in Table 1, and add the corresponding two new extreme points to the set Θ . If equality holds for conditions, ignore; the corresponding point is already added, or will be added later.

Note that, in Step 2, we always have $C_{xy} > C'_{xy}$, because of the ordering in Step 0.

Theorem 4. The maximum size of the resulting set Θ in the improvement proposed in Steps 0 to 2 as above is

$$|\mathcal{A}|^2 + 3|\mathcal{A}| + 1 \tag{34}$$

which is also the maximum number of shortest path sub-problems to solve.

Proof. In Step 0, we add one element, $(0, 0)$. For each arc in \mathcal{A} , we add four elements in Step 1; therefore we add $4|\mathcal{A}|$ elements. For each pair from \mathcal{A} , we add two elements in Step 2, that is, we add 2 elements for $\frac{|\mathcal{A}|(|\mathcal{A}|-1)}{2}$ pairs. Therefore, we obtain

$$1 + 4|\mathcal{A}| + 2 \frac{|\mathcal{A}|(|\mathcal{A}| - 1)}{2} = |\mathcal{A}|^2 + 3|\mathcal{A}| + 1$$

If there are some extreme points that coincide with others, the total number is less than (34). \square

Once the set Θ is determined, the optimal value is determined by:

$$Z^* = \min_{(\theta_u, \theta_v) \in \Theta} \min_{x \in \Omega} \Gamma_u \theta_u + \Gamma_v \theta_v + \sum_{(i,j)} (p_{ij}c_{ij}x_{ij} + \rho_{ij} + \mu_{ij}) \tag{35}$$

where $\rho_{ij} + \mu_{ij}$ values are determined as in (25).

Although the order of computational complexity of the improved dual variable enumeration approach is same as the original—still $O(|\mathcal{A}|^2)$ or $O(|\mathcal{N}|^4)$ —the improved approach solves significantly smaller number of sub problems. We demonstrate this point with examples later.

3.2 Another Improvement of the Dual-Variable Enumeration Approach

While searching the sets of Θ_1 , Θ_2 , and Θ_3 , we shall record the current minimum value, z^\sharp , of the objective function value

$$\Gamma_u \theta_u + \Gamma_v \theta_v + \sum_{(i,j)} (p_{ij} c_{ij} x_{ij} + \rho_{ij} + \mu_{ij})$$

When we encounter a next (θ_u, θ_v) pair, we first examine if we need to solve the corresponding shortest path sub-problem. If

$$\Gamma_u \theta_u + \Gamma_v \theta_v \geq z^\sharp \tag{36}$$

then we do not need to solve the shortest path sub-problem for the current (θ_u, θ_v) dual variable pair. All coefficients p, q, c and d are nonnegative—recall that we assumed so—therefore the optimal objective function value of the shortest path sub-problem is nonnegative. Consequently, if the condition (36) is met, the current (θ_u, θ_v) cannot yield a better objective function value than the objective function value z^\sharp .

With this improvement, we can save computing time by missing many shortest path sub-problems to solve, but we cannot generally quantify how many shortest path sub-problems we can skip. In an application in Section 6, this technique is shown to be very effective in saving computing time.

In summary, an improved form of the dual-variable enumeration approach can be stated as follows:

Step 0. Determine the set Θ as in Section 3.1. Set $z^\sharp \leftarrow \infty$ and $k \leftarrow 1$.

Step 1. Let (θ_u^k, θ_v^k) be the k -th element of Θ . If

$$\Gamma_u \theta_u^k + \Gamma_v \theta_v^k \geq z^\sharp$$

go to Step 3.

Step 2 For (θ_u^k, θ_v^k) , by solving a shortest-path problem, compute the following:

$$z^k = \Gamma_u \theta_u^k + \Gamma_v \theta_v^k + \sum_{(i,j)} (p_{ij} c_{ij} x_{ij} + \rho_{ij}^k + \mu_{ij}^k)$$

where $\rho_{ij}^k + \mu_{ij}^k$ is determined as in (25) for (θ_u^k, θ_v^k) . If $z^k < z^\sharp$, set $z^\sharp \leftarrow z^k$.

Step 3. Update $k \leftarrow k + 1$, and repeat Steps 1 and 2 until $k = |\mathcal{A}|$.

4 A Path Enumeration Approach

In this section, we provide another algorithm whose worst-case complexity is exponential, but may be efficient in many real cases. Let us denote the nominal shortest path by l_1 and its corresponding

objective function value and x -value by z_1 and x^1 , respectively. That is,

$$z_1 = \min_{x \in \Omega} \sum p_{ij} c_{ij} x_{ij} = \sum p_{ij} c_{ij} x_{ij}^1 \quad (37)$$

The corresponding maximum possible path cost is obtained by

$$z_1^R = \max_{u \in U, v \in V} \sum (p_{ij} + q_{ij} u_{ij})(c_{ij} + d_{ij} v_{ij}) x_{ij}^1$$

which can be solved as a linear program; see (6). Similarly, we define z_k and z_k^R for any path l_k . Then, we note that the following relationship holds:

$$z_k \leq z_k^R \quad \forall l_k$$

The objective of the robust problem is to find a path l_* that attains $z_*^R = \min_{l_k \in \mathcal{P}} z_k^R$. After solving the nominal shortest path problem (37), we know

$$z_*^R \leq z_1^R$$

Therefore, any path l_k whose nominal path cost is greater than z_k^R is not a solution to the robust problem, because for such path l_k , we have $z_*^R \leq z_1^R < z_k \leq z_k^R$.

Let us now define the set of all paths whose nominal objective function value (z_k) is less than or equals to z_1^R

$$\mathcal{P}_c = \{l_1, l_2, \dots, l_{|\mathcal{P}_c|}\}$$

We know that the set \mathcal{P}_c contains the robust path. Therefore, once we have the set \mathcal{P}_c , computing z_k^R for all paths in the set requires solving $|\mathcal{P}_c|$ linear programs, whose dimension is as small as three times the number of arcs contained in each path l_k .

To determine the set \mathcal{P}_c , we can use any K -shortest paths finding algorithm that provides paths in the ascending order of path length and allows termination at any point when the path length exceeds a certain value. Therefore the complexity of finding the set \mathcal{P}_c depends on the size of the set and the complexity of finding K -shortest paths. For example, we can use Yen's algorithm [18] whose complexity is $O(K|\mathcal{N}|(|\mathcal{A}| + |\mathcal{N}| \log |\mathcal{N}|))$. However, the number K for our algorithm is unknown *a priori*, and in the worst case K is equal to the number of all available paths; therefore the worst case complexity becomes exponential.

We can further reduce the computational effort by stopping the algorithm as soon as the nominal path cost exceeds the minimum value of z_k^R among the paths found so far. That is, when we construct the set \mathcal{P}_c , we update the reference cost value by the current value of $\min_{l_j \in \mathcal{P}_c} z_j^R$. The algorithm is summarized as follows:

Step 0. Find the nominal shortest path l_1 by solving a shortest path problem, and obtain the worst-case path cost z_1^R by solving the $3|l_1|$ -dimensional linear program of the form (6). Set $k = 1$, $z^R = z_1^R$ and $l^* = l_1$.

Step 1. Find the next best nominal shortest path l_{k+1} with $z_{k+1} \leq z^R$. If no such path exists, stop. l^* is the optimal robust path.

Step 2. Obtain the worst-path cost z_{k+1}^R by solving the $3|l_{k+1}|$ -dimensional linear program of the form (6). If $z_{k+1}^R \leq z^R$ then set $z^R = z_{k+1}^R$ and $l^* = l_{k+1}$. Set $k = k + 1$. Go to Step 1 and repeat.

This path enumeration algorithm is shown to be more efficient than the dual variable enumeration method when the level of uncertainty is small in Table 8.

5 Comparison with the Existing Approach

We can compare our robust problem (4) with the “regular” approach of Bertsimas and Sim [7] considering a single uncertain cost vector. Let us define the single uncertain cost vector $\tilde{m}_{ij} = \tilde{p}_{ij}\tilde{c}_{ij}$ so that

$$\tilde{m}_{ij} \in [p_{ij}c_{ij}, (p_{ij} + q_{ij})(c_{ij} + d_{ij})] \equiv [m_{ij}, m_{ij} + n_{ij}] \quad (38)$$

In addition we define $z^{UV}(\Gamma_u, \Gamma_v)$ to denote the optimal objective function value of the proposed approach in (4) with budgets of uncertainty Γ_u and Γ_v , and $z^W(\Gamma_w)$ to denote the optimal objective function value of the regular approach with the single uncertain cost vector in (38) with the single budget of uncertainty Γ_w . That is,

$$\begin{aligned} z^{UV}(\Gamma_u, \Gamma_v) &= \min_{x \in \Omega} \max_{u \in U, v \in V} \sum_{(i,j)} (p_{ij} + q_{ij}u_{ij})(c_{ij} + d_{ij}v_{ij})x_{ij} \\ z^W(\Gamma_w) &= \min_{x \in \Omega} \max_{w \in W} \sum_{(i,j)} (m_{ij} + n_{ij}w_{ij})x_{ij} \end{aligned}$$

where

$$W = \left\{ w : 0 \leq w_{ij} \leq 1 \quad \forall(i, j), \quad \sum_{(i,j)} w_{ij} \leq \Gamma_w \right\}$$

When the regular approach is used, a challenge is how to determine the budget Γ_w . Determining Γ_u and Γ_v is easier, because we could directly observe the data source for each data type to determine the budgets of uncertainty. On the other hand, the new single parameter m is *manipulated* after data collection. Therefore, it is not obvious how we should determine how uncertain the new manipulated data is. We may determine $\Gamma_w = \Gamma_u = \Gamma_v$; then we always have $z^W(\Gamma_w) \leq z^{UV}(\Gamma_u, \Gamma_v)$. That is, the worst-case may not be captured by the regular approach; therefore, we need the proposed approach to consider the real worst-case even in the special case. We further provide the following results without proof:

Lemma 4. Depending on the budgets of uncertainty, we can compare the proposed approach with the regular approach [7] as follows:

1. If $\Gamma_w \leq \min(\Gamma_u, \Gamma_v)$, we always have $z^W(\Gamma_w) \leq z^{UV}(\Gamma_u, \Gamma_v)$.

2. If $\Gamma_w = \Gamma_u = \Gamma_v$, we always have $z^W(\Gamma_w) \leq z^{UV}(\Gamma_u, \Gamma_v)$.

3. If $\Gamma_w = \Gamma_u + \Gamma_v$, we always have $z^W(\Gamma_w) \geq z^{UV}(\Gamma_u, \Gamma_v)$.

Proof. Let $f(x, u, v) = \sum_{(i,j)}(p_{ij} + q_{ij}u_{ij})(c_{ij} + d_{ij}v_{ij})x_{ij}$ and $g(x, w) = \sum_{(i,j)}(m_{ij} + n_{ij}w_{ij})x_{ij}$, then

$$z^{UV}(\Gamma_u, \Gamma_v) = \min_{x \in \Omega} \max_{u \in U, v \in V} f(x, u, v) \quad (39)$$

$$z^W(\Gamma_w) = \min_{x \in \Omega} \max_{w \in W} g(x, w) \quad (40)$$

1. ($\Gamma_w \leq \min(\Gamma_u, \Gamma_v)$) For a certain $x \in \Omega$, let $\check{w} = \arg \max_{w \in W} g(x, w)$. Let $\check{u} = \check{w}$ and $\check{v} = \check{w}$. Then $\check{u} \in U$ and $\check{v} \in V$ with $\Gamma_w \leq \min(\Gamma_u, \Gamma_v)$. Therefore we obtain

$$\max_{w \in W} g(x, w) \leq \max_{u \in U, v \in V} f(x, u, v) \quad \forall x \in \Omega \quad (41)$$

Let (\bar{x}, \bar{w}) be a solution to (40), i.e. $z^W(\Gamma_w) = g(\bar{x}, \bar{w})$. Then

$$z^W(\Gamma_w) \leq \max_{w \in W} g(x, w) \leq \max_{u \in U, v \in V} f(x, u, v) \quad \forall x \in \Omega \quad (42)$$

and consequently,

$$z^W(\Gamma_w) \leq \min_{x \in \Omega} \max_{u \in U, v \in V} f(x, u, v) = z^{UV}(\Gamma_u, \Gamma_v) \quad (43)$$

which completes proof for the case $\Gamma_w = \Gamma_u = \Gamma_v$.

2. ($\Gamma_w = \Gamma_u = \Gamma_v$) This is a special case of $\Gamma_w \leq \min(\Gamma_u, \Gamma_v)$.

3. ($\Gamma_w = \Gamma_u + \Gamma_v$) This case can be similarly proved. For a certain $x \in \Omega$, let $(\check{u}, \check{v}) = \arg \max_{u \in U, v \in V} f(x, u, v)$. Let $\check{w} = \max(\check{u}, \check{v})$ where ‘max’ operation is taken for each element, then $\check{w} \in W$ with $\Gamma_w = \Gamma_u + \Gamma_v$. Therefore we obtain

$$\max_{w \in W} g(x, w) \geq \max_{u \in U, v \in V} f(x, u, v) \quad \forall x \in \Omega \quad (44)$$

Let $(\bar{x}, \bar{u}, \bar{v})$ be a solution to (39), i.e. $z^{UV}(\Gamma_u, \Gamma_v) = f(\bar{x}, \bar{u}, \bar{v})$. Then

$$z^{UV}(\Gamma_u, \Gamma_v) \leq \max_{u \in U, v \in V} f(x, u, v) \leq \max_{w \in W} g(x, w) \quad \forall x \in \Omega \quad (45)$$

Thus,

$$z^{UV}(\Gamma_u, \Gamma_v) \leq \min_{x \in \Omega} \max_{w \in W} g(x, w) = z^W(\Gamma_w) \quad (46)$$

This completes the proof.

□

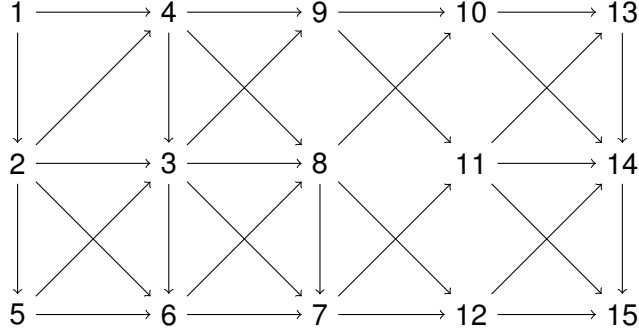


Figure 5: An abstract test network with 15 nodes and 33 links.

In the first and second cases of Lemma 4, one would determine Γ_w at the minimum budget of Γ_u and Γ_v , but the worst-case cannot be captured with the regular approach. Setting $\Gamma_w = \Gamma_u + \Gamma_v$ as in the third case would capture the worst-case with the regular approach, but in general it leads to unnecessarily conservative results. Therefore, one may choose Γ_w in the interval of $[\min(\Gamma_u, \Gamma_v), \Gamma_u + \Gamma_v]$, but a proper choice is ambiguous to make.

5.1 Abstract Example

We also show, using an example, that the model of Bertsimas and Sim [7] may not be proper when the two cost coefficients are uncertain independently. We use an abstract network presented in Figure 5. The test network consists of 15 nodes and 33 links with randomly generated cost coefficients in Table 2. We used Node 1 and Node 15 as origin and destination, respectively.

We intend to compare the performance of the nominal shortest path, the robust shortest path by the Bertsimas-Sim (B-S) model [7] with a single cost vector, and the robust shortest path proposed in this paper. We used $\Gamma_u = 2$ and $\Gamma_v = 3$ for the proposed model, and we tested $\Gamma = 1, 2, \dots, 9$ for the B-S model. The obtained paths are presented in Table 3.

Note that the B-S model cannot provide the path l^* , as seen in Table 3. The path l^* is the solution of the model proposed in this paper. Therefore, if the uncertainty of two costs coefficients acts indeed independently, the B-S model cannot provide an optimal robust path with any budget of uncertainty, Γ , although the worst-case cost of l_1, \dots, l_3 is not significantly larger than the worst-case cost of l^* in this example.

However, we cannot directly compare the performances of the B-S model and our model, since they are just different models for different settings. We also cannot directly compare the performances of the B-S paths with different budgets of uncertainty. For example, the path l_5 is optimally robust with $\Gamma = 5$, while the path l_4 is with $\Gamma = 4$. Although l_4 seems more robust to smaller uncertainties than l_5 , it is not true. When $\Gamma = 2$, the worst-case costs of l_4 and l_5 are 24,521 and 22,897, respectively (Table 4).

We do not intend to conclude which is a better robust model; rather, we want to point out that an *optimal, robust* path is specific to the network structure, the cost coefficient values, and

Table 2: Cost coefficients used for the test network

(i, j)	p_{ij}	q_{ij}	c_{ij}	d_{ij}	(i, j)	p_{ij}	q_{ij}	c_{ij}	d_{ij}
(1, 4)	79	31	66	28	(7, 11)	79	54	23	3
(1, 2)	59	97	41	93	(7, 12)	10	37	35	43
(2, 4)	31	21	50	40	(8, 7)	95	71	85	56
(2, 3)	90	52	95	38	(8, 10)	0	95	16	64
(2, 5)	9	23	95	59	(8, 12)	30	38	16	3
(2, 6)	32	57	73	7	(9, 10)	5	69	51	71
(3, 9)	89	100	38	21	(9, 11)	44	60	60	17
(3, 8)	66	13	4	72	(10, 13)	79	78	16	59
(3, 6)	68	95	58	58	(10, 14)	91	59	64	61
(3, 7)	47	12	56	20	(11, 14)	53	38	84	77
(4, 3)	14	19	36	84	(11, 15)	80	85	78	6
(4, 9)	95	65	88	42	(11, 13)	56	23	26	85
(4, 8)	88	13	62	54	(12, 15)	75	80	31	38
(5, 3)	44	8	62	53	(12, 14)	1	100	18	40
(5, 6)	83	66	30	19	(13, 14)	48	28	45	33
(6, 7)	33	3	7	8	(14, 15)	25	71	33	56
(6, 8)	37	99	29	46					

Table 3: Comparison of Various Paths

Description	Path Name	Setting	Path	Worst-Case Cost ^b
Nominal	l_0	$\Gamma = 0$	$\{1, 2, 4, 3, 8, 12, 14, 15\}$	37,016
B-S ^a	l_1	$\Gamma = 1$	$\{1, 4, 3, 8, 12, 14, 15\}$	25,616
	l_2	$\Gamma = 2$	$\{1, 4, 3, 8, 12, 14, 15\}$	25,616
	l_3	$\Gamma = 3$	$\{1, 4, 3, 8, 12, 14, 15\}$	25,616
	l_4	$\Gamma = 4$	$\{1, 4, 3, 7, 12, 15\}$	25,697
	l_5	$\Gamma = 5$	$\{1, 4, 3, 8, 12, 15\}$	27,035
	l_6	$\Gamma = 6$	$\{1, 4, 3, 8, 12, 15\}$	27,035
	This Paper	l^*	$\Gamma_u = 2, \Gamma_v = 3$	$\{1, 4, 3, 7, 12, 14, 15\}$

^a Bertsimas and Sim [7]^b The worst-case cost measured with the uncertainty set with $\Gamma_u = 2$ and $\Gamma_v = 3$.

Table 4: Comparison of Worst-Case Costs in Various Settings for Paths in Table 3

	l_0	l_1, l_2, l_3	l_4	l_5, l_6	l^*
$\Gamma = 0^a$	6,060	7,305	11,025	8,787	9,543
$\Gamma = 1^b$	24,545	15,024^c	19,395	17,157	17,262
$\Gamma = 2$	32,264	20,864	24,521	22,897	23,102
$\Gamma = 3$	38,104	26,604	27,977	28,023	28,228
$\Gamma = 4$	43,844	31,730	31,293	31,479	31,684
$\Gamma = 5$	47,300	35,186	33,145	32,291	35,000
$\Gamma_u = 1, \Gamma_v = 1^d$	24,545	15,024	19,395	17,157	17,262
$\Gamma_u = 1, \Gamma_v = 2$	29,297	19,776	21,607	21,909	19,474
$\Gamma_u = 2, \Gamma_v = 1$	26,888	17,070	21,441	19,203	19,308
$\Gamma_u = 1, \Gamma_v = 3$	30,697	21,988	22,783	24,121	20,650
$\Gamma_u = 2, \Gamma_v = 2$	32,264	21,822	24,521	23,955	23,102
$\Gamma_u = 3, \Gamma_v = 1$	28,688	18,870	22,736	19,887	21,108
$\Gamma_u = 1, \Gamma_v = 4$	31,937	23,164	23,723	25,297	21,590
$\Gamma_u = 2, \Gamma_v = 3$	37,016	25,616	25,697	27,035	25,314
$\Gamma_u = 3, \Gamma_v = 2$	34,064	23,622	25,816	24,943	25,148
$\Gamma_u = 4, \Gamma_v = 1$	29,738	19,554	23,420	20,495	22,403
$\Gamma_u = 1, \Gamma_v = 5$	33,113	23,254	24,153	25,387	22,020
$\Gamma_u = 2, \Gamma_v = 4$	38,256	27,828	26,637	28,211	26,490
$\Gamma_u = 3, \Gamma_v = 3$	38,816	27,662	27,977	28,023	28,228
$\Gamma_u = 4, \Gamma_v = 2$	35,114	24,610	26,500	25,627	26,443
$\Gamma_u = 5, \Gamma_v = 1$	30,422	20,162	24,092	20,547	23,087
$\Gamma_u = 2, \Gamma_v = 5$	39,432	29,004	27,067	28,301	27,430
$\Gamma_u = 3, \Gamma_v = 4$	42,856	30,742	29,013	30,491	29,404
$\Gamma_u = 4, \Gamma_v = 3$	39,866	28,650	29,272	28,707	29,523
$\Gamma_u = 5, \Gamma_v = 2$	35,798	25,294	27,172	26,235	27,127
$\Gamma_u = 3, \Gamma_v = 5$	44,096	31,918	29,953	30,581	30,344
$\Gamma_u = 4, \Gamma_v = 4$	43,906	31,730	31,293	31,479	31,684
$\Gamma_u = 5, \Gamma_v = 3$	40,854	29,334	29,944	29,315	30,207
$\Gamma_u = 4, \Gamma_v = 5$	46,312	34,198	32,233	31,569	32,720
$\Gamma_u = 5, \Gamma_v = 4$	44,894	32,414	31,965	32,087	32,979
$\Gamma_u = 5, \Gamma_v = 5$	47,362	35,186	33,145	32,291	35,000

^a Deterministic (nominal) cost.

^b Worst-case costs are computed with the uncertainty set of Bertsimas and Sim [7] with the corresponding Γ .

^c The minimum value in each row is bold faced.

^d Worst-case costs are computed with the uncertainty set of this paper with the corresponding Γ_u and Γ_v .

Table 5: Comparison of computing times for the abstract example

	Nominal	B-S	Dual-0 ^a	Dual-1 ^b	Dual-2 ^c	Path-Enum ^d
Computing Time (sec)	0.008	0.019	1.787	0.290	0.230	4.759
No. of Shortest-Path Problems	1	34	7850	1189	916	–
No. of Paths	–	–	–	–	–	188

^a The dual variable enumeration approach, without any improvement

^b The dual variable enumeration approach, with the first improvement

^c The dual variable enumeration approach, with the first and second improvements

^d The path enumeration approach

the choice of the budget of uncertainty. However, in some applications, it may be unclear how to choose a *combined, single* budget of uncertainty (Γ) for the multiplication of two cost coefficients, as opposed to two separated budgets of uncertainty (Γ_u and Γ_v). We will discuss this point in depth later in this paper. In addition, the performance also depends on what measure we use. A performance test may lead to a different result with a different measure, for example, mean, variance, value-at-risk, etc.

For this test network, the computation times are provided in Table 5. We note that the two improvements in the dual variable enumeration approach reduce the number of shortest-path sub-problems from 7,850 to 915. Algorithms were implemented with MATLAB and executed in a generic PC.

6 An Application to Hazardous Materials Transportation

Accidents involving hazardous materials (hazmat) are low-probability, high-consequence incidents. While the probability of hazmat accidents is very low, the consequences can be catastrophic. The U.S. had about 15,000 hazmat accidents in the year 1998 only 429 of which were classified as serious accidents [13]. There are two important facts that make hazmat problems a proper application of the proposed robust optimization approach. First, historical data sufficient to construct a stochastic distribution are rarely available in realistic problems. Hazmat accident probabilities are hard to obtain because hazmat accidents, especially serious ones, are rare events. In real routing decision-making, the accident probabilities of general traffic are used to estimate the accident probabilities of hazmat trucks, but the two kinds of probabilities might be very different. We cannot know if they are different or the same, due to the lack of available data. In addition, the consequences of hazmat accidents depend on weather conditions like wind speed and direction, the number of people present at the time of an accident, the effectiveness of evacuation, the seriousness of the accident, etc. Therefore, the impacted number of people at a hazmat accident is very difficult to estimate and subject to uncertainty. Again, historical data is not usually available for consequences.

Second, the sources of the two types of data—probabilities and consequences—are different. Accident probabilities are obtained from organizations like the U.S. Department of Transportation

and its sub-divisions including the Pipeline and Hazardous Materials Safety Administration and the Federal Emergency Management Agency. Accident consequence data may be computed based on population information and travel pattern information available through the U.S. Census Bureau and the U.S. Commodity Flow Survey by the U.S. Bureau of Transportation Statistics. Therefore it is hard to determine a single budget of uncertainty for the regular approach with a single uncertain cost vector [7] as described in Section 5.

In addition, it is unclear if the two data are correlated. One might think that the congestion level would be high in the links with high consequence level, and the accident probability is an increasing function of the congestion level; hence, there exists positive correlation between the accident probability and the accident. However, Martin [16] observed that accident rates are highest when traffic is lightest and lowest when traffic level is modest. It is found that the accident rate decreases and then increases as the traffic volume increases. In light traffic, the accident rate is higher on weekends, while it is higher on weekdays in heavy traffic. Lord et al. [15] observed that the relationship between accident rates and traffic flow cannot be described fully without considering vehicle density, level of service, vehicle occupancy, volume/capacity ratio, and speed distribution. In addition, these studies are for all vehicles, not exclusively for hazmat vehicles. The relationship between the accident probability of hazmat vehicles and the hazmat accident consequence is hard to study, because of lack of historical data. This indicates that it is unclear how the uncertainty of the accident probability and the accident consequence can be modeled as a single data type.

Although we used population data as the measure of the accident consequence for illustration purpose in the subsequent section, depending on how the consequence is measured, the relationship varies. In an uncongested road with low population, the accident consequence by the population measure is small. However, if a nuclear power plant is located nearby, a hazmat accident would bring unwanted catastrophe. Therefore, the relationship between the accident probability and the accident consequence also depends on the measure of consequence and it is unclear what the nature of correlation between two data is, if it exists.

Suppose that we have some estimates of hazmat accident probability and accident consequence, denoted by p_{ij} and c_{ij} , respectively, in each road segment (i, j) . The expected consequence of a hazmat truck traveling along path l is as follows [4]:

$$R^l = \sum_{(i_k, j_k) \in \mathcal{A}_l} \prod_{(i_h, j_h) \in \mathcal{A}_l, h < k} (1 - p_{i_h j_h}) p_{i_k j_k} c_{i_k j_k} \quad (47)$$

where \mathcal{A}_l is the set of all arcs in path l , and (i_k, j_k) is the k -th arc in path l . The expression (47) assumes that the shipment terminates once an accident happens in any road segment. It is noted that accident probabilities p_{ij} are extremely small, usually in the range of 10^{-8} to 10^{-6} per mile traveled [1]. Therefore we can approximate as

$$\prod_{(i_h, j_h) \in \mathcal{A}_l, h < k} (1 - p_{i_h j_h}) \approx 1$$

Consequently, we obtain the following approximation [12]:

$$R^l \approx \sum_{(i,j) \in \mathcal{A}_l} p_{ij} c_{ij} \quad (48)$$

The resulting nominal problem to minimize the expected consequence is a shortest path of the form (1).

Due to lack of data, the accident probability p_{ij} is subject to uncertainty. In addition, the accident consequence c_{ij} is also hard to estimate. In many hazmat accidents, especially those involving explosives or poisonous gas, the weather conditions are important factors [3]. One needs to consider uncertain factors involving weather conditions to determine the safest path in hazmat transportation. However, accurate weather conditions can be difficult to obtain and the resulting accident consequences may be computed as interval data at best. Therefore, the robust optimization model (4) is a natural approach to minimize the expected consequence in the worst-case scenario in hazmat transportation.

6.1 Numerical Results

We provide numerical results of the proposed algorithms based on Albany, New York, USA and its nearby highway network. The transportation network considered consists of 90 nodes and 150 links as presented in Figure 6.

The nominal accident probabilities are computed by $p_{ij} = 10^{-6} \times (\text{length of link } (i, j))$ as in Abkowitz and Cheng [1]. The nominal accident consequences c_{ij} are computed using the λ -neighborhood concept developed by Batta and Chiu [5]. The road length and population statistics are obtained from Department of Transportation and Department of Commerce websites. We generated q_{ij} and d_{ij} randomly, but in the same order as the nominal coefficients, p_{ij} and c_{ij} . We used $\Gamma_u = 4$ and $\Gamma_v = 8$. While the randomly generated uncertain intervals do not represent any real scenario, our intention is to show that considering two multiplicative uncertain cost coefficients as a single coefficient may not capture the worst-case properly, and the robustness may not be proportional to the single budget of uncertainty with such consideration.

We find paths from origin node 1 to destination node 12. The nominal shortest path is

$$\text{NSP} = \{1, 70, 45, 13, 81, 72, 73, 69, 66, 67, 68, 41, 29, 30, 12\}$$

the B-S robust shortest path with $\Gamma = 4$ is

$$\text{BS4} = \{1, 70, 45, 13, 14, 15, 81, 72, 73, 63, 52, 51, 50, 49, 48, 47, 40, 41, 29, 30, 12\}$$

the B-S robust shortest path with $\Gamma = 8$ is

$$\text{BS8} = \{1, 70, 45, 13, 14, 15, 81, 72, 73, 69, 66, 67, 68, 41, 29, 30, 12\}$$

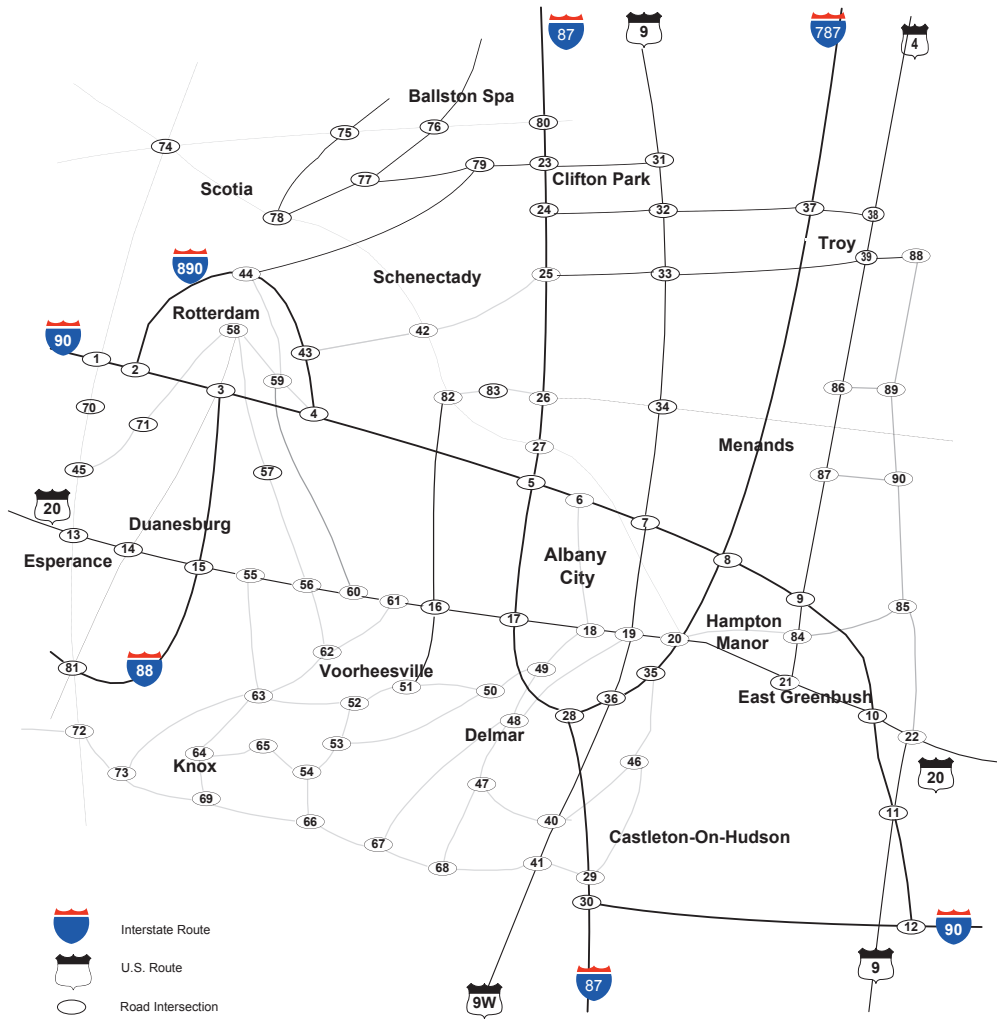


Figure 6: Albany Area Highway Network (90 nodes, 150 links)

Table 6: Comparison of computing times for the Albany network

	Nominal	B-S	Dual-0	Dual-1	Dual-2	Path-Enum
Computing Time (sec)	0.013	0.106	95.737	13.923	3.769	150.389
No. of Shortest Path Problems	1	151	151,148	22,951	6,056	–
No. of Paths	–	–	–	–	–	1,323

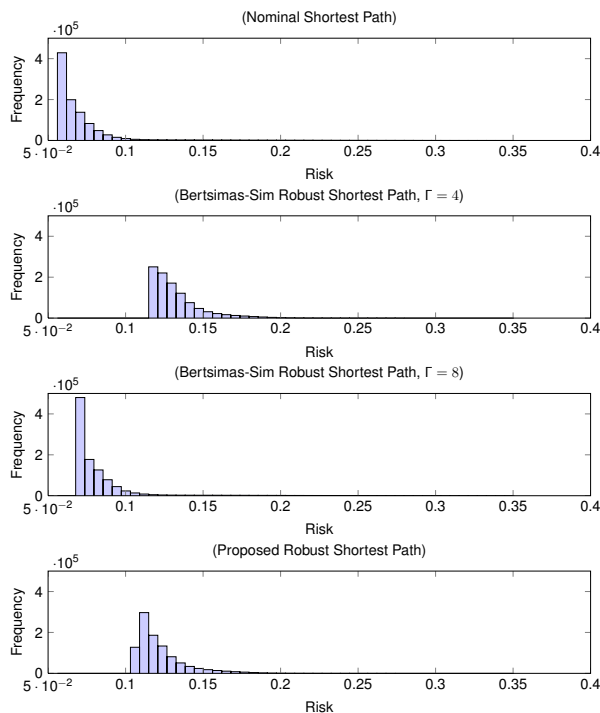


Figure 7: Histogram of the Realized Path Costs (1,000,000 samples)

and the proposed robust shortest path with $\Gamma_u = 4$ and $\Gamma_v = 8$ is

$$\text{KLB48} = \{1, 70, 45, 13, 81, 72, 73, 63, 52, 51, 50, 49, 48, 47, 40, 41, 29, 30, 12\}$$

(KLB is from the initials of the authors' last names.) The Dijkstra's algorithm for the nominal shortest path took 0.013 seconds, and the B-S robust shortest paths with the corresponding algorithm [7] were obtained after 0.106 seconds of computing time. For the proposed robust shortest path computation, the dual variable enumeration method (with the two improvements) took 3.769 seconds after solving 6,056 shortest path problems, and the path enumeration method took 150.389 seconds after finding 1,323 paths. The computing time is summarized in Table 6. We used MATLAB at a generic PC running Windows 7.

To test the path performances of the above four paths, we randomly allocate the budget of uncertainty ($\Gamma_u = 4, \Gamma_v = 8$), to $\{u_{ij}\}$ and $\{v_{ij}\}$, independently from each other. Although the worst-case happens when $\{u_{ij}\}$ and $\{v_{ij}\}$ are binary, we allowed any value between 0 and 1 in the simulation. We generated 1,000,000 samples and the histograms of path-costs are presented for all

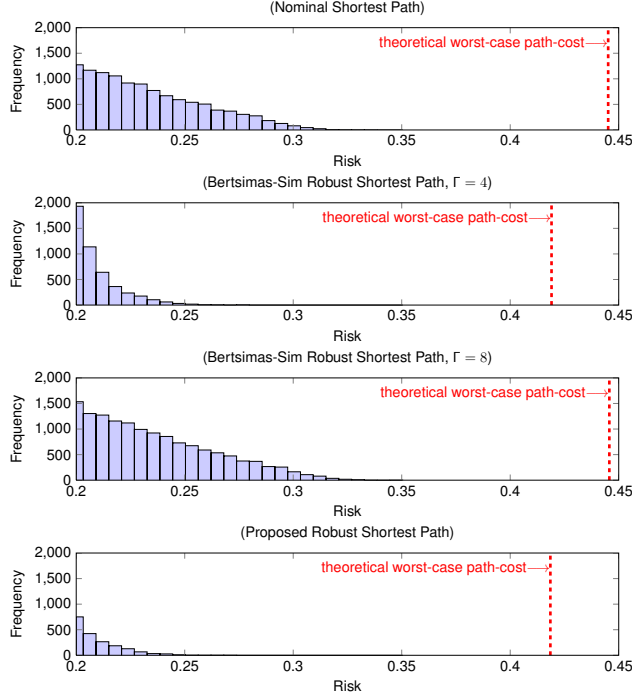


Figure 8: Closer look to histogram of the realized path costs

four paths in Figure 7. In the simulation, we assumed the link costs are distributed uniformly within the uncertain intervals, $\tilde{p}_{ij} \in [p_{ij}, p_{ij} + q_{ij}]$ and $\tilde{c}_{ij} \in [c_{ij}, c_{ij} + d_{ij}]$. Since the budget of uncertainty was allocated to links that are not included in the above four paths in many realizations, the far left path-costs in the histogram represent the nominal path-costs in the four paths. The NSP and BS8 paths show better nominal performances than the BS4 and KLB48 paths. However, higher path-costs, which are of interest in the robust optimization framework, show different patterns.

To observe path performances in the long tail, we provide a closer look to the histograms in Figure 8. The KLB48 path shows the best performance in the long-tail, which should not be a surprise since the KLB48 path is supposed so. One interesting observation in Figure 8 is that the BS8 path is weak to uncertainty and its performance is even worse than the NSP and BS4 paths. Using dashed lines, we also provide the theoretical worst-case path-costs, which the KLB48 path minimizes. The BS4 path is close to the KLB48 path in terms of the theoretical worst-case cost (the path selections are similar), and is better than the BS8 path.

A detailed summary is provided in Table 7. To compare the worst-case performances in other scenarios, we provide the theoretical worst-case path-costs in three cases: (1) treating two coefficients as a single coefficient with $\Gamma = 4$, denoted by $\text{one}(\Gamma = 4)$, (2) same treatment but with $\Gamma = 8$, denoted by $\text{one}(\Gamma = 8)$, (3) two coefficients separately as proposed in this paper, denoted by $\text{two}(\Gamma_u = 4, \Gamma_v = 8)$. While the theoretical worst-case path-costs do not differ very much among the four paths in the first two cases, the third case exhibits significant differences. This indicates that when more accurate robust path selection is necessary, considering two coefficients as a single coefficient may lead to non-robust path selection. In the later part in Table 7, we provide the worst-

case, mean, and variance from the simulation results, which are consistent with the observations already explained.

Table 7: Summary of theoretical worst-case path-costs and the simulation results

	Nominal Path NSP	B-S Path ($\Gamma = 4$) BS4	B-S Path ($\Gamma = 8$) BS8	Proposed Path ($\Gamma_u = 4, \Gamma_v = 8$) KLB48
Theoretical worst-case path-cost				
($\Gamma = 4$) ^a	0.2443	0.2380	0.2428	0.2386
($\Gamma = 8$)	0.2843	0.2828	0.2821	0.2849
($\Gamma_u = 4, \Gamma_v = 8$) ^b	0.4451	0.4190	0.4457	0.4185
Summary of realized path-costs (1,000,000 samples); ($\Gamma_u = 4, \Gamma_v = 8$)				
worst-case	0.3379	0.2793	0.3475	0.2697
mean	0.0714	0.1323	0.0817	0.1220
variance ($\times 10^{-4}$)	6.2520	2.4310	6.2840	2.4000

^a (Γ) means when two cost coefficients are treated as a single cost coefficient as in the B-S model.

^b (Γ_u, Γ_v) means when two cost coefficients are treated as proposed in this paper.

We also compare the computing performance of the dual variable enumeration (with improvements) and the path enumeration methods. For the test purpose, we set

$$\left. \begin{aligned} \Gamma_u = \Gamma_v = \tau \\ q_{ij} = 0.1 \times \tau \times p_{ij} \\ d_{ij} = 0.1 \times \tau \times c_{ij} \end{aligned} \right\} \text{ for } \tau = 1, 2, \dots, 25$$

in the Albany network. As τ increases, the intervals of uncertainty become bigger, and therefore the number of paths to be found in the path enumeration method increases. Until τ is 6, the path enumeration method outperforms the dual variable enumeration method, but for τ bigger than 6, the dual variable enumeration method finds the optimal solution faster. The computation time and the number of paths found are reported in Table 8 and Figure 9. We also note that the computation time save is significant with the two improvements for the dual variable enumeration approach.

7 Conclusions

The robust shortest path problem considered in this paper has the cost coefficients as multiplications of two uncertain parameters. We have shown that the problem can be solved by a dual variable enumeration method and a path enumeration method, both of which are exact algorithms. The dual variable enumeration method requires solving a finite number of shortest path sub-problems. The path enumeration method generates paths using a K -shortest paths algorithm, and it may be

Table 8: Comparison of Dual Variable Enumeration Approaches and Path Enumeration Approach

τ	Dual-0		Dual-1		Dual-2		Path-Enum	
	Time ^a	No. SPP ^b	Time	No. SPP	Time	No. SPP	Time	No. Path ^c
1	108.952	147,493	16.936	22,951	16.999	22,951	0.112	1
2	109.408	147,545	17.017	22,951	15.766	21,313	0.214	2
3	110.256	147,607	16.956	22,951	13.980	18,803	0.674	7
4	109.978	147,691	17.045	22,951	11.563	15,511	1.965	20
5	110.108	147,761	17.042	22,951	9.893	13,111	3.634	35
6	110.517	147,867	17.227	22,951	8.546	11,319	8.047	69
7	110.406	147,931	17.047	22,951	7.365	9,755	13.552	112
8	110.423	148,051	17.135	22,951	6.294	8,315	22.131	168
9	110.025	148,129	17.092	22,951	5.320	7,033	29.117	226
10	109.803	148,211	17.110	22,951	4.457	5,903	38.039	326

^a computation time measure in seconds

^b number of shortest path problems solved

^c number of paths found

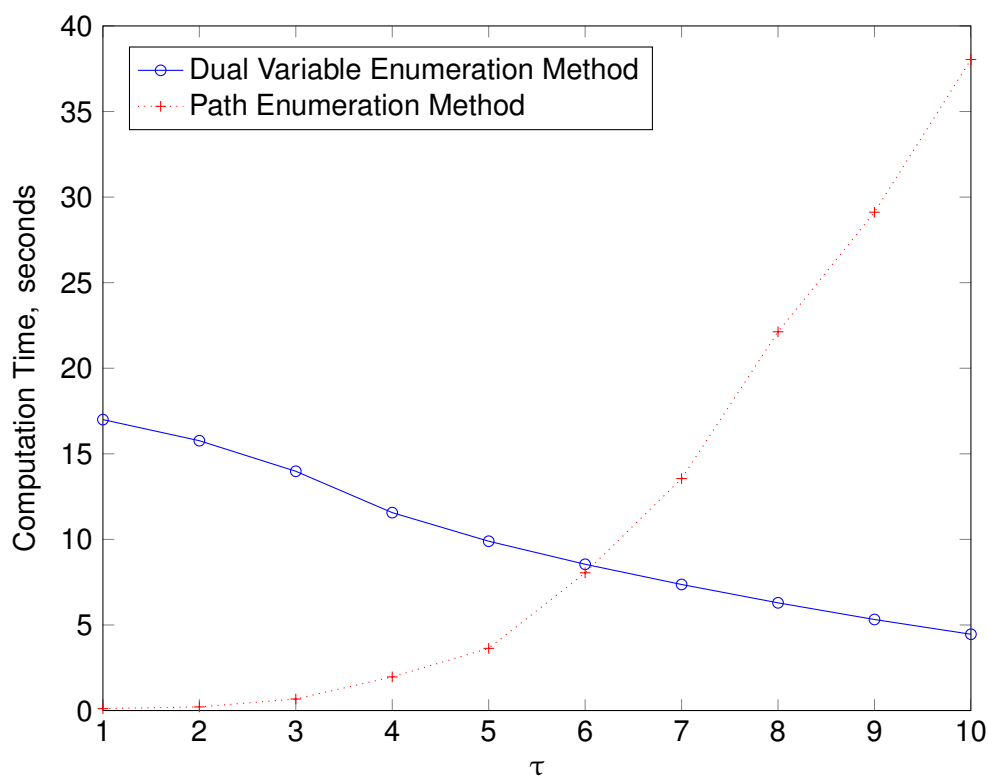


Figure 9: Computation Time for the Two Solution Methods

useful when the network size and the level of uncertainty are small. While we found an application in hazardous materials transportation, we may apply our results to any risk mitigation problems involving network-structured decision processes.

Acknowledgements

The first author's research was partially supported by NSF grant CMMI-1068585. The second author's research was supported by research funds of Chonbuk National University in 2011.

References

- [1] M. Abkowitz and PD Cheng. Developing a risk/cost framework for routing truck movements of hazardous materials. *Accident Analysis and Prevention*, 20(1):39, 1988.
- [2] Ravindra K. Ahuja, Kurt Mehlhorn, James Orlin, and Robert E. Tarjan. Faster algorithms for the shortest path problem. *J. ACM*, 37:213–223, April 1990. ISSN 0004-5411. doi: <http://doi.acm.org/10.1145/77600.77615>. URL <http://doi.acm.org/10.1145/77600.77615>.
- [3] V. Akgun, A. Parekh, R. Batta, and C. Rump. Routing of a hazmat truck in the presence of weather systems. *Computers & Operations Research*, 34(5): 1351–1373, May 2007. ISSN 03050548. doi: 10.1016/j.cor.2005.06.005. URL <http://dx.doi.org/10.1016/j.cor.2005.06.005>.
- [4] E. Alp. Risk-based transportation planning practice: Overall methodology and a case example. *INFOR*, 33(1):4–19, 1995.
- [5] R. Batta and S.S. Chiu. Optimal obnoxious paths on a network: Transportation of hazardous materials. *Operations Research*, 36(1):84–92, 1988.
- [6] D. Bertsimas and M. Sim. Robust Discrete Optimization Under Ellipsoidal Uncertainty Sets. 2004.
- [7] Dimitris Bertsimas and Melvyn Sim. Robust discrete optimization and network flows. *Mathematical Programming*, 98(1):49–71, September 2003. ISSN 0025-5610. doi: 10.1007/s10107-003-0396-4. URL <http://dx.doi.org/10.1007/s10107-003-0396-4>.
- [8] Dimitris Bertsimas and Robert Weismantel. *Optimization over integers*, volume 13. Dynamic Ideas Belmont, 2005.
- [9] D. Chaerani, C. Roos, and A. Aman. The Robust Shortest Path Problem by Means of Robust Linear Optimization. In Hein Fleuren, Dick Hertog, and Peter Kort, editors, *Operations Research Proceedings 2004*, volume 2004 of *Operations Research Proceedings*, chapter 42, pages

- 335–342–342. Springer Berlin Heidelberg, Berlin/Heidelberg, 2005. ISBN 3-540-24274-0. doi: 10.1007/3-540-27679-3_42. URL http://dx.doi.org/10.1007/3-540-27679-3_42.
- [10] C. A. Floudas and V. Visweswaran. *Quadratic Optimization*, pages 217–270. Kluwer Academic Publishers, 1994.
- [11] Alain Ghouila-Houri. Caractérisation des matrices totalement unimodulaires. *CR Acad. Sci. Paris*, 254:1192–1194, 1962.
- [12] H. Jin and R. Batta. Objectives derived from viewing hazmat shipments as a sequence of independent Bernoulli trials. *Transportation Science*, 31(3):252–261, 1997.
- [13] B.Y. Kara and V. Verter. Designing a road network for hazardous materials transportation. *Transportation Science*, 38(2):188, 2004.
- [14] Panos Kouvelis and Gang Yu. *Robust Discrete Optimization and Its Applications (Non-convex Optimization and Its Applications)*. Springer, 1st edition, November 1996. ISBN 9780792342915. URL <http://www.worldcat.org/isbn/0792342917>.
- [15] D. Lord, A. Manar, and A. Vizioli. Modeling crash-flow-density and crash-flow-v/c ratio relationships for rural and urban freeway segments. *Accident Analysis & Prevention*, 37(1): 185–199, 2005.
- [16] J.L. Martin. Relationship between crash rate and hourly traffic flow on interurban motorways. *Accident Analysis & Prevention*, 34(5):619–629, 2002.
- [17] Luis N. Vicente, Paul H. Calamai, and Joaquim J. Júdice. Generation of disjointly constrained bilinear programming test problems. *Computational Optimization and Applications*, 1(3):299–306, December 1992. ISSN 0926-6003. doi: 10.1007/BF00249639. URL <http://dx.doi.org/10.1007/BF00249639>.
- [18] J.Y. Yen. Finding the K shortest loopless paths in a network. *Management Science*, 17(11): 712–716, 1971. ISSN 0025-1909.